

ZAXIS170W



WHEEL EXCAVATOR

Model Code : ZX170W-5B

Engine Rated Power : 122 kW (164 HP)

Operating Weight : 17 000 - 19 100 kg

Backhoe Bucket ISO Heaped : 0.52 - 0.82 m³



WALK AROUND

CONTENTS

4-5 Versatility

A wide range of tasks can be completed by Hitachi wheeled excavators.

6-7 Productivity

Hitachi wheeled excavators have a high impact on efficiency but a low impact on the environment.

8-9 Comfort

The cab of the new Hitachi wheeled excavators provides a safer and comfortable work space.

10-11 Durability

Hitachi is renowned for manufacturing high-quality machines that can meet the demands of the toughest job sites.

12-13 Maintenance

Easily accessible features for cleaning and routine maintenance maximise the availability of the ZAXIS 170W.

14-15 Hitachi Support Chain

A wide range of after-sales services and support options is available to all our customers.

16-29 Specifications

Enhanced visibility

Visibility of the front of the machine, especially on the right-hand side, has been improved for safer operation.

Added durability

The reinforced chassis and strengthened brackets on the boom foot are capable of withstanding rugged environments.

Higher productivity

The HIOS III hydraulic system achieves higher productivity with better fuel consumption than the conventional ZAXIS model, which helps to reduce costs.

Faster movement

The arm recirculation cancel and hydraulic boosting systems increase the arm speed during operation.

New power boost

The newly provided power boost helps to increase digging power and lifting power.



ZAXIS Empower your Vision.

The design of the new Hitachi ZAXIS 170W medium excavator is inspired by one aim – empower your vision. It delivers on five key levels: performance, productivity, comfort, durability and reliability. We recognise that fleet owners require high-quality, efficient machines that can work effectively, even in challenging conditions. We also realise that operators need a safer, user-friendly work space, and a machine that can respond to their skills with speed and precision. And to achieve a satisfying result, on time, on budget and to a high standard, we have aimed to maximise availability of the new ZAXIS 170W with easy maintenance features and the Hitachi Support Chain after-sales programme.

Expanded leg room

The cab of the new ZAXIS is more spacious for the operator, with 45 mm more leg room, wider access with a flip-up side console.

Ultimate comfort

The heated suspension seat is ideal in cold climates and absorbs vibration during operation minimising operator fatigue.

Easily accessible information

The large multi-function LCD monitor screen is easy to view in bright sunlight or darkness and provides technical data.

Quick and easy service access

Inspection parts are conveniently located.






VERSATILITY

Suitable for use on any construction project, the new ZX170W-5 can be equipped with several different kinds of attachments to complete a variety of tasks. Designed to offer enhanced power and speed, and reduced running costs, it will easily outperform other models in its class. Like all new Hitachi wheeled excavators, it is also easy to operate, so that you can manoeuvre it quickly and effortlessly around the job site.



Versatile, powerful and easy to operate

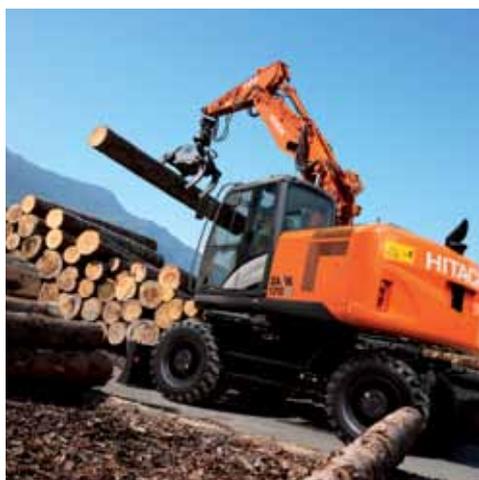

Versatile performance

Powerful, fast and easy to use, the new ZAXIS wheeled excavators are capable of impressive performance levels and are extremely versatile for a variety of applications.

The lifting capacity has been increased by 7%, extending the machine's capability for moving heavy loads. This is further enhanced by the auto power boost function, when greater force is required. Similarly, a new power boost function increases the digging force by 6% for up to eight seconds, when needed.

The front speed of the new models has been enhanced by the HIOS III boom recirculation system – pressurised oil is circulated in the boom cylinder when lowering the boom, allowing pressurised oil from the pump to be used efficiently to increase the speed of the arm.

These are easily fitted using the attachment support system, with 11 modes that can be registered on the monitor. A new pressure adjustment feature offers protection of individual attachments by setting the required pressure.

Lower fuel costs

Winning tenders and meeting production targets are highly competitive processes for you to develop your business. The choice of construction machinery is of paramount importance and your success relies on the productivity and efficiency of your equipment. This is where our new HIOS III hydraulic system comes into its own.

The latest advanced hydraulic and electronic technologies are central to our goal of delivering a significant saving on fuel costs with the new low-emission engine. We are delighted that HIOS III hydraulics allow you to achieve 5% less fuel consumption in PWR mode – than the previous ZAXIS P-mode – while maintaining a high level of productivity at the same time*.

Furthermore, a reduction of 14% in fuel consumption is also possible in ECO mode*. This still delivers a relatively high level of productivity using the same amount of fuel.

** Based upon typical work pattern collected via Global e-Service*

Key features

■ 5% reduction in fuel consumption (PWR mode vs previous P-mode)

■ 14% reduction in fuel consumption (ECO mode vs previous P-mode)

■ New HIOS III hydraulic system higher productivity and less fuel consumption

■ Attachment support system

■ Power-boost

■ Increased lifting capacity



PRODUCTIVITY

Equipped with a powerful new engine and advanced hydraulics, the ZX170W-5 is capable of achieving higher efficiency levels on the job site than previous models. It promises to bring you a quick return on your investment and contribute to greater profitability for your business. Hitachi design engineers have ensured that it meets the latest EU regulations on emission standards and have given it a variety of sustainable features intended to reduce its impact on the environment.



Greater efficiency and a smaller environmental impact



Sustainable efficiency

Minimising the environmental impact of our construction equipment was an important consideration during the design of the new ZAXIS wheeled excavators. We are committed to developing machines that are both sustainable and productive in order to meet the needs of our customers, as well as satisfy the requirements of the EU regulations on emission controls.

The ZX170W-5 is equipped with a muffler filter that captures and burns air pollutants, with an oxidation catalyst and exhaust temperature control. Levels of nitrous oxide are also reduced by the excavator's variable geometry turbocharger, which encourages optimum combustion.

Another feature designed to reduce emissions is the Auto Shut-down, which also helps to prevent fuel wastage and lowers the noise level in the cab. Combining this with the Auto-Idle function can also prevent further fuel wastage.

Powerful efficiency

Despite the reduced environmental impact of the new ZAXIS wheeled excavators, they are guaranteed to have a maximum efficiency impact at any job site. We have strived to balance our obligations to comply with the latest environmental regulations with your needs for high productivity and profitability.

Hitachi wheeled excavators are renowned for their reliability and high productivity, which is vital for meeting deadlines on busy job sites. The latest range of ZAXIS models builds upon this reputation, offering increased efficiency and sustainable operations.

** Based upon typical work pattern collected via Global e-Service*

Key features

- Powerful and sustainable
- Stage IIIB-compliant engine
- Muffler filter that captures particulate matter
- Variable geometry turbocharger – optimal combustion
- High volume-cooled EGR system
- HIOS III hydraulic system – fuel efficiency and higher productivity
- Environmentally friendly design
- Auto shut-down – fuel saving for carbon dioxide reduction



COMFORT

The latest range of ZAXIS wheeled excavators has been designed to satisfy the demands of our customers and operators around the world. The cab is more spacious than previous models, and also offers excellent visibility and a variety of user-friendly features to give an unrivalled level of comfort. Thanks to the attention to detail of Hitachi design engineers, you can enjoy spending time in the ZX170W-5, and get the job done safely and with ease.



A superior level of operator comfort



Comfort guaranteed

Long shifts on construction sites used to take their toll on operators, but the comfortable cab of the new ZAXIS wheeled excavators has been designed to ensure that once you leave work, you feel ready to enjoy the rest of your day. The ZX170W-5 now offers a more spacious working environment – with a fully adjustable suspension seat that slides further back than previous models and extended leg room by 45 mm.

Enhanced visibility

The new ZX170W-5 incorporates several developments from Hitachi that will help to enhance visibility from the operator's seat, which is essential for working safely on busy construction sites. The right side of the machine has been redesigned, including a reshaped front cover, to allow for better visibility from the cab. The new model also has a redesigned monitor that fits neatly in line with the right-hand pillar, again to enhance visibility through the front window.

A new rear-view camera provides a broader range of visibility, so you can see immediately below the counterweight. The new monitor shows both operation status icons and the rear view simultaneously, so there is no need to switch displays.

User-friendly functionality

Hitachi has invested heavily in the advanced technology inherent within the new ZAXIS. The power remains firmly at your fingertips thanks to the functionality of the colour monitor and ergonomic controls.

The new multi-function LCD monitor has a large seven-inch screen that is easy to view. It provides a wide range of useful technical information, including a clear indication of the machine's status and settings with multi-lingual support in up to 32 languages. The monitor and ergonomically designed switches have been grouped together within easy reach of your right hand. The proportional switches in the new, auxiliary function lever allow easy control of the front attachment. An auxiliary terminal has also been added to the sound system, so that you can work efficiently and smoothly to your favourite music via devices such as MP3 players and the inclusion of storage for an MP3 player.

Key features

■ High-spec ROPS cab

■ Enhanced visibility

■ New colour LCD monitor

■ Easily accessible real-time information

■ Expansive leg room

■ Ergonomically designed control panel

■ Auxiliary terminal and storage for an MP3 player



DURABILITY

Hitachi construction machinery is renowned for its high quality, reliability and durability by customers around the world. The new range of ZAXIS wheeled excavators has been developed using decades of manufacturing experience and with an advanced technological approach. That's why they are able to operate in some of the toughest environments and can be relied upon to deliver high levels of availability, no matter where they are working.



Designed to work in challenging environments



Durable parts

The new ZX170W-5 has been designed to operate in the most challenging of working conditions. Tough job sites require reliable machines, which deliver increased levels of availability and productivity. The bottom line is that you will enjoy a lower cost of ownership thanks to the durability of our wheeled excavators.

The strengthened front attachment on the new ZX170W-5 is a good example. The brackets on the boom foot and end have been equipped with a bushing to enhance its durable characteristics and withstand the rigours of long hours in rugged environments.

A filter-type high-performance water separator is provided standard. It captures moisture in fuel, even from fuel that contains a large amount of moisture.

Additional reinforcements

The chassis of the new ZAXIS wheeled excavators has been reinforced for added durability. The cover to protect the blade cylinder is larger and further protection is provided by a structure that conforms to the top and bottom of the blade.

The transmission unit is installed above the axle to prevent it hitting unexpected obstacles. It also features a reinforced outrigger cover.

Key features

- Proven Hitachi quality
- More than 40 years of expertise
- Strengthened front attachment
- Reinforced undercarriage



MAINTENANCE

The new Hitachi ZX170W-5 has been built with several easily accessible features for routine cleaning and maintenance. They will allow you to carry out daily inspections and servicing quickly and conveniently, so that you can continue with the task at hand. Maintaining consistently high levels of productivity and availability has a big impact on your business, so Hitachi engineers have created a range of wheeled excavators that you can rely on to keep working for longer.



Quick and convenient solutions to optimise availability



Easy access

A range of convenient features integrated within the new ZAXIS medium excavators are designed to make life easier. Our engineers have assessed your requirements and integrated a number of time-saving factors for routine maintenance.

Using the technology within the multi-function LCD monitor you can check engine oil volumes and see the warning light that appears when the hydraulic oil and fuel filters are due for replacement. In addition, you can set the routine service schedule to help prevent breakdowns each time the ignition switch is turned on.

The fresh air filter for the air conditioner is located to the side of the cab door from behind the operator's seat. This allows for easy cleaning and replacement of the filter. An electric fuel-refilling unit with fuel filter is also provided as standard.

From ground level, you can access the double fuel filter, engine oil filter and water separator via wide doors. Hydraulic oil can be used for up to 5,000 hours.

Minimal downtime

In order to ensure the smooth running of your machine and to minimise downtime, regular maintenance is essential. Fortunately it's easy and simple to carry out such tasks on the new ZAXIS wheeled excavators, so you can focus on getting the work done.

For example, the engine oil pan is fitted with a drain coupler, so when draining, an associated drain hose is connected to the drain coupler. The reliable drain coupler helps to prevent oil leakages and vandalism, which could both cause unnecessary downtime to any project.


Key features

- Global e-Service monitors muffler filter
- Daily checks from ground level
- Oil volumes checked from the operator's seat
- Quick and easy service access



SUPPORT CHAIN

As soon as you become a Hitachi customer, you can rely on first-class after-sales service from your authorised dealer. Hitachi provides extensive support to each of the dealers within the European network, so that they can ensure your ZAXIS 170W continues to meet your requirements and exceed expectations. To further protect your investment in Hitachi construction machinery, we have introduced the Hitachi Support Chain after-sales programme. This gives you the flexibility to create a tailor-made service plan from the the following key-areas, "links" in the chain of service available from Hitachi via your local dealer.

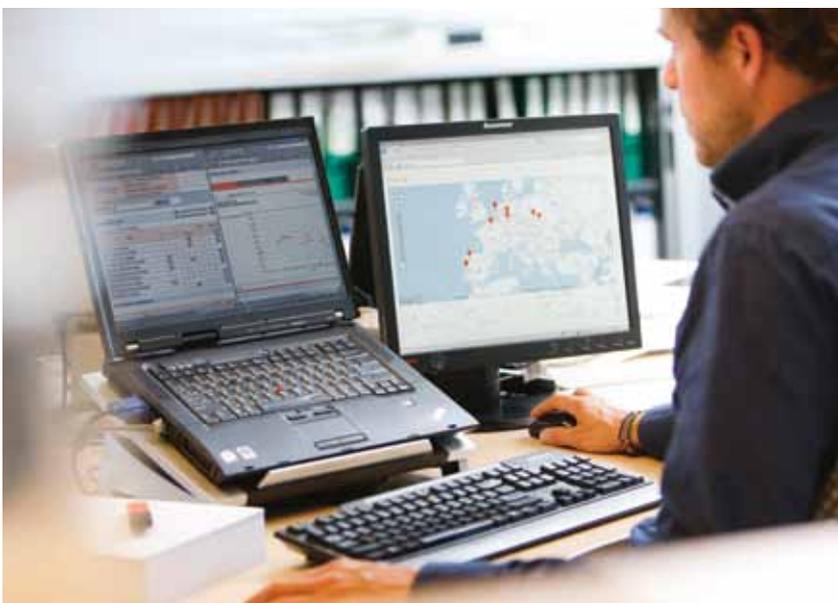

A flexible after-sales programme created to protect your investment

Global e-Service

The new ZAXIS excavator is equipped with a GPRS communication system*. This sends a wide range of machine data to the Hitachi main server. Via the Global e-Service database, you will have remote access to all of this data. All you need is an internet connection and your Global e-Service log-in details.

Global e-Service enables you and your dealer to download and share this data, helping you to remotely manage your fleet. The online facility also helps your dealer to proactively advise you on preventive maintenance and related special offers.

The latest information on the ZAXIS excavator is available 24/7 and includes operational data, such as the number of working hours, fuel consumption figures, working modes and location. This helps you to reduce running costs, plan jobs efficiently and keep up to date with machine maintenance – to ensure optimum performance and minimal downtime.

Technical support

The professional and highly trained Hitachi service team combines the global expertise and knowledge of Hitachi Construction Machinery with your local language and culture. We take a proactive approach towards customer service by continuously training our dealer personnel, so that the available global knowledge is passed on to each individual technician in our dealer network.

Extended warranty and service contracts

Every new Hitachi model is covered by a full manufacturer's warranty. However, your ZAXIS excavator may require extra protection due to severe working conditions or to minimise equipment repair costs. To meet these demands, our dealers offer the option of a unique extended warranty programme (HELP – Hitachi Extended Life Program) and comprehensive service contracts – the most effective way to optimise the performance of your new ZAXIS excavator.

Parts and Remanufactured Components

Hitachi offers different lines of parts and components to suit your specific needs. In addition to our range of genuine parts, there are other options available:

- If your machines have been working for several years, Hitachi can offer a second line of genuine parts as an attractively priced solution.
- For that highly demanding application or climate, Hitachi provides a line of parts with extra performance.
- When you are looking for an economical solution for preventive replacements, remanufactured components are the best option.

Whatever choice you make, you can be assured of the renowned Hitachi quality and warranty to give you added peace of mind.

Your Hitachi dealer can supply you with more details on each of the above parts lines.



* The GPRS communication system is standard equipment for new ZAXIS excavators, however, the availability of the communication system depends on licensing regulations in your country. Please contact your Hitachi dealer for more information or to apply for a Global e-Service account.

Key features

- Check each of your machines from your office – 24/7
- Have a remote insight into fuel consumption
- Check the current and previous locations and movements of your machine(s)

- See maintenance status and items due for renewal on each of your machines
- Receive e-mail notifications for any machine alerts, unexpected movements and so on

SPECIFICATIONS

ENGINE

Model	Isuzu AM-4HK1X
Type	4-cycle water-cooled, common rail direct injection
Aspiration	Variable geometry turbocharged, intercooled, cooled EGR
Aftertreatment	Muffler filter
No. of cylinders	4
Rated power	
ISO 9249, net	122 kW (164 HP) at 2 000 min ⁻¹ (rpm)
EEC 80/1269, net	122 kW (164 HP) at 2 000 min ⁻¹ (rpm)
SAE J1349, net	122 kW (164 HP) at 2 000 min ⁻¹ (rpm)
Maximum torque	655 Nm (66.8 kgfm) at 1 500 min ⁻¹ (rpm)
Piston displacement	5.193 L
Bore and stroke	115 mm x 125 mm
Batteries	2 x 12 V / 93 Ah

HYDRAULIC SYSTEM

Hydraulic pumps

Main pumps	2 variable displacement axial piston pumps
Maximum oil flow	2 x 157 L/min
Pilot pump	1 gear pump
Maximum oil flow	30 L/min
Steering pump	1 gear pump
Maximum oil flow	28.6 L/min

Hydraulic Motors

Travel	1 variable displacement axial piston motors
Swing	1 axial piston motor

Relief Valve Settings

Implement circuit	34.3 MPa (350 kgf/cm ²)
Swing circuit	33.4 MPa (341 kgf/cm ²)
Travel circuit	34.8 MPa (355 kgf/cm ²)
Pilot circuit	3.9 MPa (40 kgf/cm ²)
Power boost	36.3 MPa (370 kgf/cm ²)

Hydraulic Cylinders

	Quantity	Bore	Rod diameter
Boom	2	110 mm	80 mm
Arm	1	120 mm	90 mm
Bucket	1	105 mm	75 mm
Positioning ^{*1}	1	170 mm	105 mm

*1 : For 2-piece boom

UPPERSTRUCTURE

Revolving Frame

D-section frame for resistance to deformation.

Swing Device

Axial piston motor with planetary reduction gear is bathed in oil. Swing circle is single-row. Swing parking brake is spring-set/hydraulic-released disc type.

Swing speed	12.2 min ⁻¹ (rpm)
Swing torque	42.8 kNm (4 370 kgfm)

Operator's Cab

Independent spacious cab, 1 005 mm wide by 1 675 mm high, conforming to ISO* Standards.

* International Organization for Standardization

UNDERCARRIAGE

Wheeled type undercarriage. The frame is of welded, stress-relieved structure.

Drive system: 2 speed power shift transmission and variable displacement axial piston type travel motor.

Travel speed (forward and reverse)

Creep speed range

Low speed range

High speed range

Maximum traction force

Gradeability

Min. turning radius

Axle:

All-wheel drive.

The front axle can be locked hydraulically in any position.

Oscillating front axle..... ± 7°

Brakes system:

Maintenance free wet-disc brakes on axle are standard.

Fully hydraulic service brake system

SOUND LEVEL

Sound level in cab according to ISO 6396

External sound level according to ISO 6395 and

EU Directive 2000/14/EC

SERVICE REFILL CAPACITIES

Fuel tank	290.0 L
Engine coolant	25.0 L
Engine oil	23.0 L
Swing device	6.2 L
Transmission	2.5 L
Front differential gear	9.5 L
Rear differential gear	14.0 L
Hub reduction gear	
Front axle	2 x 2.5 L
Rear axle	2 x 2.5 L
Hydraulic system	180.0 L
Hydraulic tank	100.0 L

WEIGHTS

Operating weight

Arm length	Stabilization	Monoblock Boom	2-Piece Boom
		Standard gauge/Wide gauge	Standard gauge/Wide gauge
		kg	kg
2.21 m	Rear Blade	-	17 700
	Rear Outrigger	-	18 000
	Outrigger and Blade	-	18 800
	Front and Rear Outrigger	-	19 000
2.22 m	Rear Blade	17 000	-
	Rear Outrigger	17 300	-
	Outrigger and Blade	18 100	-
	Front and Rear Outrigger	18 400	-
2.50 m	Rear Blade	-	17 700
	Rear Outrigger	-	18 000
	Outrigger and Blade	-	18 800
	Front and Rear Outrigger	-	19 100
2.58 m	Rear Blade	17 100	-
	Rear Outrigger	17 400	-
	Outrigger and Blade	18 200	-
	Front and Rear Outrigger	18 400	-
3.08 m	Rear Blade	17 200	-
	Rear Outrigger	17 500	-
	Outrigger and Blade	18 300	-
	Front and Rear Outrigger	18 500	-

Including 0.60 m³ (ISO heaped), bucket weight (500 kg) and counterweight (3 600 kg).

BUCKET AND ARM DIGGING FORCE

Arm length	ZAXIS 170W with monoblock boom		
	2.22 m	2.58 m	3.08 m
Bucket digging force* ISO	108 kN (11 000 kgf)		
Bucket digging force* SAE : PCSA	95 kN (9 700 kgf)		
Arm crowd force* ISO	110 kN (11 200 kgf)	87 kN (8 900 kgf)	78 kN (7900 kgf)
Arm crowd force* SAE : PCSA	106 kN (10 800 kgf)	84 kN (8 600 kgf)	75 kN (7700 kgf)

* At power boost


Arm length	ZAXIS 170W with 2-piece boom	
	2.21 m	2.50 m
Bucket digging force* ISO	108 kN (11 000 kgf)	
Bucket digging force* SAE : PCSA	95 kN (9 700 kgf)	
Arm crowd force* ISO	93 kN (9 500 kgf)	85 kN (8 700 kgf)
Arm crowd force* SAE : PCSA	90 kN (9 100 kgf)	82 kN (8 400 kgf)

* At power boost


SPECIFICATIONS

DIMENSIONS


MONOBLOCK BOOM

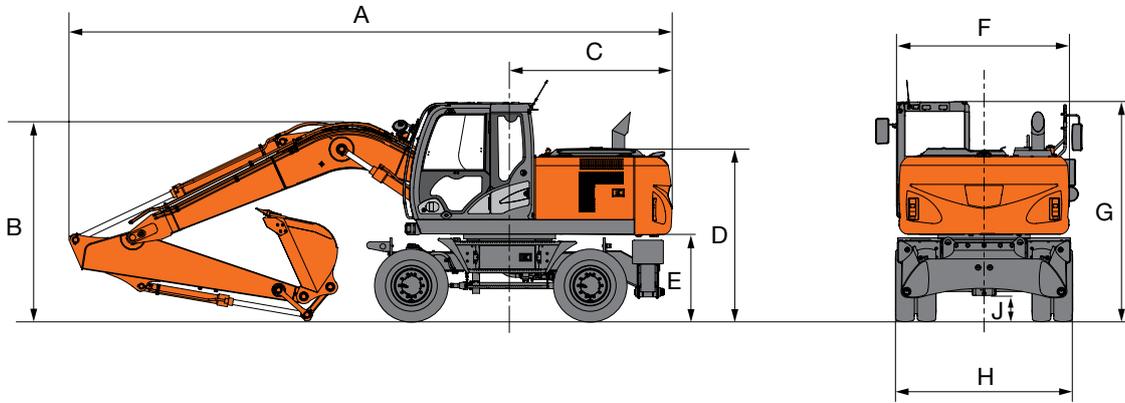



2-PIECE BOOM

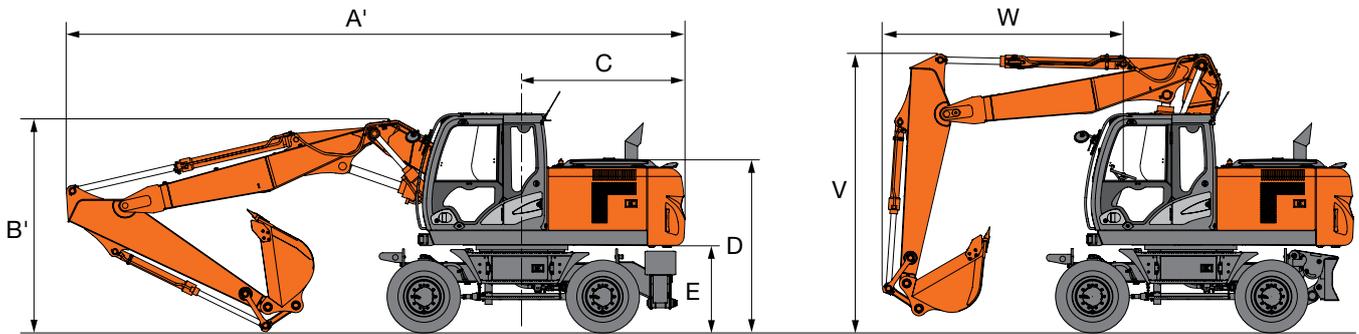



FRONT BLADE AND REAR OUTRIGGER

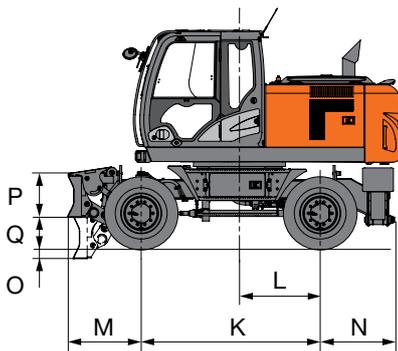

FRONT AND REAR OUTRIGGER

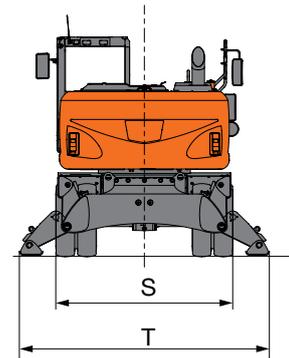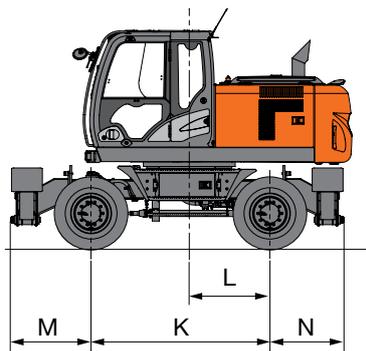

REAR BLADE

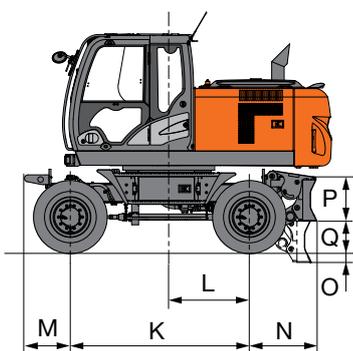

DIMENSIONS

Unit: mm


		Standard Gauge					Wide Gauge					
		Rear BL	Rear O/R	Front BL Rear O/R	Front O/R Rear BL	Front and Rear O/R	Rear BL	Rear O/R	Front BL and Rear O/R	Front O/R Rear BL	Front and Rear O/R	
A	Overall length (with monoblock boom)											
	2.22 m arm	8 690										
	2.58 m arm	8 580										
	3.08 m arm	8 520										
A'	Overall length (with 2-piece boom)											
	2.21 m arm	8 820										
	2.50 m arm	8 810										
B	Overall height (with monoblock boom)											
	2.22 m arm	3 190										
	2.58 m arm	3 130* (2 870: Boom height)										
	3.08 m arm	3 580										
B'	Overall height (with 2-piece boom)											
	2.21 m arm	3 130* (3 010: Boom height)										
	2.50 m arm	3 130* (3 050: Boom height)										
C	Rear-end swing radius	2 320										
D	Engine cover height	2 475										
E	Counterweight clearance	1 235										
F	Overall width of upper structure	2 450										
G	Overall height of cabin	3 130										
H	Overall width tires	2 550					2 750					
J	Min. ground clearance	350										
K	Wheel base	2 550										
L	Swing-centre to rear axle	1 150										
M	Front overhang	605		1 055	1 150		605		1 055	1 150		
N	Rear overhang	965	1 060		965	1 060		965	1 060		965	1 060
O	Max. blade lower	145	-	145		-	145	-	145		-	
P	Height of blade	590	-	590		-	590	-	590		-	
Q	Max. blade raise	445	-	445		-	445	-	445		-	
R	Overall width of blade	2 530	-	2 530		-	2 730	-	2 730		-	
S	Over width of O/R retract	-		2 470		-		2 470		-		
T	Overall width O/R extend	-		3 380		-		3 380		-		
V	Over height of boom (travelling)											
	2.21 m arm	3 980										
	2.50 m arm	3 980										
W	Front overhang (travelling)											
	2.21 m arm	3 070										
	2.50 m arm	3 390										

Transportation dimensions are A (A') , B (B') , H (without blade) or A (A') , B (B') , R (with blade).

*Cabin Height.

LIFTING CAPACITIES

- Notes:
1. Ratings are based on ISO 10567.
 2. Lifting capacity does not exceed 75% of tipping load with the machine on firm, level ground or 87% full hydraulic capacity.
 3. The load point is the center-line of the bucket pivot mounting pin on the arm.
 4. *Indicates load limited by hydraulic capacity.
 5. Each value with Rear blade up over the Front-axle side and each value with Rear blade down over the Rear-axle side respectively, and value in optimal position with positioning cylinder.
 6. 0 m = Ground.



A: Load radius
B: Load point height
C: Lifting capacity

For lifting capacities, subtract bucket and quick hitch weight from lifting capacities without bucket.

ZAXIS 170W MONOBLOCK BOOM, 2.58 M ARM, STANDARD GAUGE, 3 600 KG COUNTERWEIGHT

Rating over front or rear Rating over-side 360 degrees Unit: 1 000 kg

Stabilization		Load radius								At max. reach		
		3.0 m		4.5 m		6.0 m		7.5 m				Meter
6.0 m	Rear blade up (over front)					*3.75	2.84			*3.16	2.63	6.27
	Rear blade down (over rear)					*3.75	3.21			*3.16	2.98	
	Rear outrigger down (over rear)					*3.75	*3.75			*3.16	*3.16	
	Front outrigger and rear blade down (over rear)					*3.75	*3.75			*3.16	*3.16	
	Front blade and rear outrigger down (over rear)					*3.75	*3.75			*3.16	*3.16	
	4 outrigger down (over rear)					*3.75	*3.75			*3.16	*3.16	
4.5 m	Rear blade up (over front)			*5.47	4.33	4.43	2.78			*3.10	2.10	7.09
	Rear blade down (over rear)			*5.47	4.92	*4.76	3.15			*3.10	2.39	
	Rear outrigger down (over rear)			*5.47	*5.47	*4.76	3.73			*3.10	2.85	
	Front outrigger and rear blade down (over rear)			*5.47	*5.47	*4.76	4.65			*3.10	*3.10	
	Front blade and rear outrigger down (over rear)			*5.47	*5.47	*4.76	*4.76			*3.10	*3.10	
	4 outrigger down (over rear)			*5.47	*5.47	*4.76	*4.76			*3.10	*3.10	
3.0 m	Rear blade up (over front)			6.62	4.00	4.27	2.64	3.04	1.86	3.03	1.86	7.51
	Rear blade down (over rear)			*6.65	4.57	*5.16	3.00	*3.25	2.13	*3.21	2.12	
	Rear outrigger down (over rear)			*6.65	5.50	*5.16	3.58	*3.25	2.55	*3.21	2.54	
	Front outrigger and rear blade down (over rear)			*6.65	*6.65	*5.16	4.50	*3.25	3.20	*3.21	3.19	
	Front blade and rear outrigger down (over rear)			*6.65	*6.65	*5.16	4.60	*3.25	*3.25	*3.21	*3.21	
	4 outrigger down (over rear)			*6.65	*6.65	*5.16	*5.16	*3.25	*3.25	*3.21	*3.21	
1.5 m	Rear blade up (over front)			6.25	3.67	4.11	2.49	2.98	1.80	2.91	1.76	7.61
	Rear blade down (over rear)			*7.54	4.24	*5.54	2.85	*4.05	2.07	*3.49	2.02	
	Rear outrigger down (over rear)			*7.54	5.14	*5.54	3.43	*4.05	2.48	*3.49	2.43	
	Front outrigger and rear blade down (over rear)			*7.54	6.61	*5.54	4.33	*4.05	3.13	*3.49	3.07	
	Front blade and rear outrigger down (over rear)			*7.54	6.79	*5.54	4.44	*4.05	3.21	*3.49	3.14	
	4 outrigger down (over rear)			*7.54	*7.54	*5.54	5.17	*4.05	3.72	*3.49	*3.49	
0 m	Rear blade up (over front)	*5.44	*5.44	6.04	3.49	3.99	2.38			2.99	1.80	7.40
	Rear blade down (over rear)	*5.44	*5.44	*7.70	4.05	*5.61	2.74			*4.03	2.07	
	Rear outrigger down (over rear)	*5.44	*5.44	*7.70	4.94	*5.61	3.31			*4.03	2.49	
	Front outrigger and rear blade down (over rear)	*5.44	*5.44	*7.70	6.39	*5.61	4.21			*4.03	3.15	
	Front blade and rear outrigger down (over rear)	*5.44	*5.44	*7.70	6.57	*5.61	4.32			*4.03	3.23	
	4 outrigger down (over rear)	*5.44	*5.44	*7.70	*7.70	*5.61	5.05			*4.03	3.75	
-1.5 m	Rear blade up (over front)	*9.66	6.23	5.98	3.44	3.95	2.35			3.32	1.99	6.84
	Rear blade down (over rear)	*9.66	7.39	*7.07	4.00	*5.16	2.71			*4.22	2.28	
	Rear outrigger down (over rear)	*9.66	9.36	*7.07	4.89	*5.16	3.27			*4.22	2.76	
	Front outrigger and rear blade down (over rear)	*9.66	*9.66	*7.07	6.34	*5.16	4.17			*4.22	3.49	
	Front blade and rear outrigger down (over rear)	*9.66	*9.66	*7.07	6.52	*5.16	4.28			*4.22	3.58	
	4 outrigger down (over rear)	*9.66	*9.66	*7.07	*7.07	*5.16	5.01			*4.22	4.17	
-3.0 m	Rear blade up (over front)	*7.39	6.37	5.55	3.51					*3.90	2.49	5.85
	Rear blade down (over rear)	*7.39	*7.39	*5.55	4.06					*3.90	2.87	
	Rear outrigger down (over rear)	*7.39	*7.39	*5.55	4.96					*3.90	3.46	
	Front outrigger and rear blade down (over rear)	*7.39	*7.39	*5.55	*5.55					*3.90	*3.90	
	Front blade and rear outrigger down (over rear)	*7.39	*7.39	*5.55	*5.55					*3.90	*3.90	
	4 outrigger down (over rear)	*7.39	*7.39	*5.55	*5.55					*3.90	*3.90	

ZAXIS 170W MONOBLOCK BOOM, 2.58 M ARM, WIDE GAUGE, 3 600 KG COUNTERWEIGHT

 Rating over front or rear  Rating over-side 360 degrees Unit: 1 000 kg

Stabilization		Load radius								At max. reach		
		3.0 m		4.5 m		6.0 m		7.5 m				Meter
												
6.0 m	Rear blade up (over front)					*3.75	3.10			*3.16	2.87	6.27
	Rear blade down (over rear)					*3.75	3.50			*3.16	*3.16	
	Rear outrigger down (over rear)					*3.75	*3.75			*3.16	*3.16	
	Front outrigger and rear blade down (over rear)					*3.75	*3.75			*3.16	*3.16	
	Front blade and rear outrigger down (over rear)					*3.75	*3.75			*3.16	*3.16	
	4 outrigger down (over rear)					*3.75	*3.75			*3.16	*3.16	
4.5 m	Rear blade up (over front)			*5.47	4.74	4.35	3.03			*3.10	2.31	7.09
	Rear blade down (over rear)			*5.47	5.39	*4.76	3.44			*3.10	2.62	
	Rear outrigger down (over rear)			*5.47	*5.47	*4.76	3.90			*3.10	2.98	
	Front outrigger and rear blade down (over rear)			*5.47	*5.47	*4.76	*4.76			*3.10	*3.10	
	Front blade and rear outrigger down (over rear)			*5.47	*5.47	*4.76	*4.76			*3.10	*3.10	
	4 outrigger down (over rear)			*5.47	*5.47	*4.76	*4.76			*3.10	*3.10	
3.0 m	Rear blade up (over front)			6.51	4.40	4.20	2.89	2.98	2.05	2.98	2.04	7.51
	Rear blade down (over rear)			*6.65	5.04	*5.16	3.29	*3.25	2.34	*3.21	2.33	
	Rear outrigger down (over rear)			*6.65	5.77	*5.16	3.75	*3.25	2.67	*3.21	2.66	
	Front outrigger and rear blade down (over rear)			*6.65	*6.65	*5.16	4.70	*3.25	*3.25	*3.21	*3.21	
	Front blade and rear outrigger down (over rear)			*6.65	*6.65	*5.16	4.78	*3.25	*3.25	*3.21	*3.21	
	4 outrigger down (over rear)			*6.65	*6.65	*5.16	*5.16	*3.25	*3.25	*3.21	*3.21	
1.5 m	Rear blade up (over front)			6.14	4.07	4.04	2.74	2.92	1.99	2.86	1.95	7.61
	Rear blade down (over rear)			*7.54	4.69	*5.54	3.14	*4.05	2.27	*3.49	2.23	
	Rear outrigger down (over rear)			*7.54	5.41	*5.54	3.59	*4.05	2.60	*3.49	2.55	
	Front outrigger and rear blade down (over rear)			*7.54	6.95	*5.54	4.53	*4.05	3.27	*3.49	3.21	
	Front blade and rear outrigger down (over rear)			*7.54	7.09	*5.54	4.61	*4.05	3.33	*3.49	3.26	
	4 outrigger down (over rear)			*7.54	*7.54	*5.54	5.17	*4.05	3.72	*3.49	*3.49	
0 m	Rear blade up (over front)	*5.44	*5.44	5.93	3.88	3.92	2.63			2.93	1.98	7.40
	Rear blade down (over rear)	*5.44	*5.44	*7.70	4.49	*5.61	3.03			*4.03	2.28	
	Rear outrigger down (over rear)	*5.44	*5.44	*7.70	5.21	*5.61	3.48			*4.03	2.61	
	Front outrigger and rear blade down (over rear)	*5.44	*5.44	*7.70	6.73	*5.61	4.41			*4.03	3.29	
	Front blade and rear outrigger down (over rear)	*5.44	*5.44	*7.70	6.87	*5.61	4.49			*4.03	3.35	
	4 outrigger down (over rear)	*5.44	*5.44	*7.70	*7.70	*5.61	5.05			*4.03	3.75	
-1.5 m	Rear blade up (over front)	*9.66	7.03	5.88	3.83	3.88	2.60			3.25	2.19	6.84
	Rear blade down (over rear)	*9.66	8.37	*7.07	4.44	*5.16	2.99			*4.22	2.52	
	Rear outrigger down (over rear)	*9.66	*9.66	*7.07	5.16	*5.16	3.44			*4.22	2.89	
	Front outrigger and rear blade down (over rear)	*9.66	*9.66	*7.07	6.67	*5.16	4.37			*4.22	3.65	
	Front blade and rear outrigger down (over rear)	*9.66	*9.66	*7.07	6.81	*5.16	4.45			*4.22	3.72	
	4 outrigger down (over rear)	*9.66	*9.66	*7.07	*7.07	*5.16	5.01			*4.22	4.17	
-3.0 m	Rear blade up (over front)	*7.39	7.19	*5.55	3.90					*3.90	2.75	5.85
	Rear blade down (over rear)	*7.39	*7.39	*5.55	4.51					*3.90	3.16	
	Rear outrigger down (over rear)	*7.39	*7.39	*5.55	5.23					*3.90	3.63	
	Front outrigger and rear blade down (over rear)	*7.39	*7.39	*5.55	*5.55					*3.90	*3.90	
	Front blade and rear outrigger down (over rear)	*7.39	*7.39	*5.55	*5.55					*3.90	*3.90	
	4 outrigger down (over rear)	*7.39	*7.39	*5.55	*5.55					*3.90	*3.90	

LIFTING CAPACITIES

ZAXIS 170W 2-PIECE BOOM, 2.50 M ARM, STANDARD GAUGE, 3 600 KG COUNTERWEIGHT

 Rating over front or rear  Rating over-side 360 degrees Unit: 1 000 kg

Stabilization		Load radius										At max. reach		
		1.5 m		3.0 m		4.5 m		6.0 m		7.5 m		At max. reach		Meter
														
7.5 m	Rear blade up (over front)					*4.26	*4.26					*2.45	*2.45	5.48
	Rear blade down (over rear)					*4.26	*4.26					*2.45	*2.45	
	Rear outrigger down (over rear)					*4.26	*4.26					*2.45	*2.45	
	Front outrigger and rear blade down (over rear)					*4.26	*4.26					*2.45	*2.45	
	Front blade and rear outrigger down (over rear)					*4.26	*4.26					*2.45	*2.45	
	4 outrigger down (over rear)					*4.26	*4.26					*2.45	*2.45	
6.0 m	Rear blade up (over front)					*4.36	*4.36	*4.08	2.91			*2.12	*2.12	6.76
	Rear blade down (over rear)					*4.36	*4.36	*4.08	3.29			*2.12	*2.12	
	Rear outrigger down (over rear)					*4.36	*4.36	*4.08	3.87			*2.12	*2.12	
	Front outrigger and rear blade down (over rear)					*4.36	*4.36	*4.08	*4.08			*2.12	*2.12	
	Front blade and rear outrigger down (over rear)					*4.36	*4.36	*4.08	*4.08			*2.12	*2.12	
	4 outrigger down (over rear)					*4.36	*4.36	*4.08	*4.08			*2.12	*2.12	
4.5 m	Rear blade up (over front)			*6.56	*6.56	*5.09	4.42	*4.33	2.96	*2.16	1.88	*2.01	1.87	7.52
	Rear blade down (over rear)			*6.56	*6.56	*5.09	4.95	*4.33	3.30	*2.16	2.16	*2.01	*2.01	
	Rear outrigger down (over rear)			*6.56	*6.56	*5.09	*5.09	*4.33	3.83	*2.16	*2.16	*2.01	*2.01	
	Front outrigger and rear blade down (over rear)			*6.56	*6.56	*5.09	*5.09	*4.33	*4.33	*2.16	*2.16	*2.01	*2.01	
	Front blade and rear outrigger down (over rear)			*6.56	*6.56	*5.09	*5.09	*4.33	*4.33	*2.16	*2.16	*2.01	*2.01	
	4 outrigger down (over rear)			*6.56	*6.56	*5.09	*5.09	*4.33	*4.33	*2.16	*2.16	*2.01	*2.01	
3.0 m	Rear blade up (over front)			*7.61	7.51	*6.25	4.29	4.37	2.95	3.08	1.88	*2.00	1.67	7.92
	Rear blade down (over rear)			*7.61	*7.61	*6.25	4.80	*4.80	3.27	*4.05	2.16	*2.00	1.92	
	Rear outrigger down (over rear)			*7.61	*7.61	*6.25	5.60	*4.80	3.78	*4.05	2.58	*2.00	*2.00	
	Front outrigger and rear blade down (over rear)			*7.61	*7.61	*6.25	*6.25	*4.80	4.56	*4.05	3.23	*2.00	*2.00	
	Front blade and rear outrigger down (over rear)			*7.61	*7.61	*6.25	*6.25	*4.80	4.65	*4.05	3.31	*2.00	*2.00	
	4 outrigger down (over rear)			*7.61	*7.61	*6.25	*6.25	*4.80	*4.80	*4.05	3.82	*2.00	*2.00	
1.5 m	Rear blade up (over front)			*9.58	*7.39	6.44	*4.24	4.35	2.85	3.02	1.83	*2.09	1.59	8.02
	Rear blade down (over rear)			*9.58	8.42	*7.22	4.74	*5.26	3.23	*4.25	2.10	*2.09	1.84	
	Rear outrigger down (over rear)			*9.58	*9.58	*7.22	5.52	*5.26	3.79	*4.25	2.53	*2.09	*2.09	
	Front outrigger and rear blade down (over rear)			*9.58	*9.58	*7.22	6.72	*5.26	4.53	*4.25	3.18	*2.09	*2.09	
	Front blade and rear outrigger down (over rear)			*9.58	*9.58	*7.22	6.86	*5.26	4.62	*4.25	3.25	*2.09	*2.09	
	4 outrigger down (over rear)			*9.58	*9.58	*7.22	*7.22	*5.26	*5.20	*4.25	3.77	*2.09	*2.09	
0 m	Rear blade up (over front)	*8.35	*8.35	*11.27	7.42	*6.49	4.17	4.33	2.69	2.94	1.75	*2.29	1.62	7.82
	Rear blade down (over rear)	*8.35	*8.35	*11.27	8.54	*7.53	4.77	*5.47	3.05	*4.26	2.02	*2.29	1.87	
	Rear outrigger down (over rear)	*8.35	*8.35	*11.27	10.23	*7.53	5.60	*5.47	3.64	4.25	2.45	*2.29	2.28	
	Front outrigger and rear blade down (over rear)	*8.35	*8.35	*11.27	*11.27	*7.53	6.77	*5.47	4.55	*4.26	3.10	*2.29	*2.29	
	Front blade and rear outrigger down (over rear)	*8.35	*8.35	*11.27	*11.27	*7.53	6.91	*5.47	4.66	*4.26	3.18	*2.29	*2.29	
	4 outrigger down (over rear)	*8.35	*8.35	*11.27	*11.27	*7.53	*7.53	*5.47	*5.23	*4.26	3.69	*2.29	*2.29	
-1.5 m	Rear blade up (over front)	*13.50	*13.50	*12.18	7.08	6.66	3.98	4.14	2.49			*2.68	1.78	7.29
	Rear blade down (over rear)	*13.50	*13.50	*12.18	8.33	*7.64	4.57	*5.61	2.87			*2.68	2.06	
	Rear outrigger down (over rear)	*13.50	*13.50	*12.18	10.42	*7.64	5.51	*5.61	3.46			*2.68	2.50	
	Front outrigger and rear blade down (over rear)	*13.50	*13.50	*12.18	*12.18	*7.64	7.03	*5.61	4.36			*2.68	*2.68	
	Front blade and rear outrigger down (over rear)	*13.50	*13.50	*12.18	*12.18	*7.64	7.15	*5.61	4.47			*2.68	*2.68	
	4 outrigger down (over rear)	*13.50	*13.50	*12.18	*12.18	*7.64	*7.64	*5.61	5.21			*2.68	*2.68	
-3.0 m	Rear blade up (over front)	*21.49	*21.49	*12.68	7.04	6.39	3.74	4.04	2.38			*3.76	2.30	6.15
	Rear blade down (over rear)	*21.49	*21.49	*12.68	8.28	*7.79	4.32	*4.62	2.75			*3.76	2.66	
	Rear outrigger down (over rear)	*21.49	*21.49	*12.68	10.37	*7.79	5.26	*4.62	3.34			*3.76	3.22	
	Front outrigger and rear blade down (over rear)	*21.49	*21.49	*12.68	*12.68	*7.79	6.75	*4.62	4.25			*3.76	*3.76	
	Front blade and rear outrigger down (over rear)	*21.49	*21.49	*12.68	*12.68	*7.79	6.93	*4.62	4.37			*3.76	*3.76	
	4 outrigger down (over rear)	*21.49	*21.49	*12.68	*12.68	*7.79	*7.79	*4.62	*4.62			*3.76	*3.76	

ZAXIS 170W 2-PIECE BOOM, 2.50 M ARM, WIDE GAUGE, 3 600 KG COUNTERWEIGHT

 Rating over front or rear  Rating over-side 360 degrees Unit: 1 000 kg

Stabilization		Load radius										At max. reach		
		1.5 m		3.0 m		4.5 m		6.0 m		7.5 m		At max. reach		Meter
														
7.5 m	Rear blade up (over front)					*4.26	*4.26					*2.45	*2.45	5.48
	Rear blade down (over rear)					*4.26	*4.26					*2.45	*2.45	
	Rear outrigger down (over rear)					*4.26	*4.26					*2.45	*2.45	
	Front outrigger and rear blade down (over rear)					*4.26	*4.26					*2.45	*2.45	
	Front blade and rear outrigger down (over rear)					*4.26	*4.26					*2.45	*2.45	
	4 outrigger down (over rear)					*4.26	*4.26					*2.45	*2.45	
6.0 m	Rear blade up (over front)					*4.36	*4.36	*4.08	3.18			*2.12	*2.12	6.76
	Rear blade down (over rear)					*4.36	*4.36	*4.08	3.58			*2.12	*2.12	
	Rear outrigger down (over rear)					*4.36	*4.36	*4.08	4.03			*2.12	*2.12	
	Front outrigger and rear blade down (over rear)					*4.36	*4.36	*4.08	*4.08			*2.12	*2.12	
	Front blade and rear outrigger down (over rear)					*4.36	*4.36	*4.08	*4.08			*2.12	*2.12	
	4 outrigger down (over rear)					*4.36	*4.36	*4.08	*4.08			*2.12	*2.12	
4.5 m	Rear blade up (over front)			*6.56	*6.56	*5.09	4.79	*4.33	3.20	*2.16	2.08	*2.01	*2.01	7.52
	Rear blade down (over rear)			*6.56	*6.56	*5.09	*5.09	*4.33	3.57	*2.16	*2.16	*2.01	*2.01	
	Rear outrigger down (over rear)			*6.56	*6.56	*5.09	*5.09	*4.33	3.98	*2.16	*2.16	*2.01	*2.01	
	Front outrigger and rear blade down (over rear)			*6.56	*6.56	*5.09	*5.09	*4.33	*4.33	*2.16	*2.16	*2.01	*2.01	
	Front blade and rear outrigger down (over rear)			*6.56	*6.56	*5.09	*5.09	*4.33	*4.33	*2.16	*2.16	*2.01	*2.01	
	4 outrigger down (over rear)			*6.56	*6.56	*5.09	*5.09	*4.33	*4.33	*2.16	*2.16	*2.01	*2.01	
3.0 m	Rear blade up (over front)			*7.61	*7.61	*6.25	4.65	4.31	*3.17	3.02	2.07	*2.00	1.84	7.92
	Rear blade down (over rear)			*7.61	*7.61	*6.25	5.20	*4.80	3.52	*4.05	2.37	*2.00	*2.00	
	Rear outrigger down (over rear)			*7.61	*7.61	*6.25	5.83	*4.80	3.93	*4.05	2.70	*2.00	*2.00	
	Front outrigger and rear blade down (over rear)			*7.61	*7.61	*6.25	*6.25	*4.80	4.73	*4.05	3.37	*2.00	*2.00	
	Front blade and rear outrigger down (over rear)			*7.61	*7.61	*6.25	*6.25	*4.80	4.79	*4.05	3.43	*2.00	*2.00	
	4 outrigger down (over rear)			*7.61	*7.61	*6.25	*6.25	*4.80	*4.80	*4.05	3.82	*2.00	*2.00	
1.5 m	Rear blade up (over front)			*9.58	8.11	6.36	4.59	4.30	3.11	2.97	2.02	*2.09	1.76	8.02
	Rear blade down (over rear)			*9.58	9.27	*7.22	5.14	*5.26	3.52	*4.25	2.31	*2.09	2.03	
	Rear outrigger down (over rear)			*9.58	*9.58	*7.22	5.76	*5.26	*3.93	*4.25	2.65	*2.09	*2.09	
	Front outrigger and rear blade down (over rear)			*9.58	*9.58	*7.22	6.98	*5.26	4.70	*4.25	3.32	*2.09	*2.09	
	Front blade and rear outrigger down (over rear)			*9.58	*9.58	*7.22	7.08	*5.26	4.75	*4.25	3.37	*2.09	*2.09	
	4 outrigger down (over rear)			*9.58	*9.58	*7.22	*7.22	*5.26	*5.20	*4.25	3.77	*2.09	*2.09	
0 m	Rear blade up (over front)	*8.35	*8.35	*11.27	8.24	6.41	4.59	4.26	2.95	2.89	1.94	*2.29	1.80	7.82
	Rear blade down (over rear)	*8.35	*8.35	*11.27	9.39	*7.53	*5.21	*5.47	3.35	*4.26	2.23	*2.29	2.07	
	Rear outrigger down (over rear)	*8.35	*8.35	*11.27	10.72	*7.53	5.82	*5.47	3.81	4.26	2.57	*2.29	*2.29	
	Front outrigger and rear blade down (over rear)	*8.35	*8.35	*11.27	*11.27	*7.53	7.03	*5.47	4.75	*4.26	3.24	*2.29	*2.29	
	Front blade and rear outrigger down (over rear)	*8.35	*8.35	*11.27	*11.27	*7.53	7.12	*5.47	4.83	*4.26	3.29	*2.29	*2.29	
	4 outrigger down (over rear)	*8.35	*8.35	*11.27	*11.27	*7.53	*7.53	*5.47	*5.23	*4.26	3.69	*2.29	*2.29	
-1.5 m	Rear blade up (over front)	*13.50	*13.50	12.17	7.94	6.55	4.39	4.07	2.76			*2.68	1.97	7.29
	Rear blade down (over rear)	*13.50	*13.50	*12.18	9.37	*7.64	5.04	*5.61	3.16			*2.68	2.28	
	Rear outrigger down (over rear)	*13.50	*13.50	*12.18	*11.05	*7.64	5.80	*5.61	3.62			*2.68	2.63	
	Front outrigger and rear blade down (over rear)	*13.50	*13.50	*12.18	*12.18	*7.64	7.24	*5.61	4.56			*2.68	*2.68	
	Front blade and rear outrigger down (over rear)	*13.50	*13.50	*12.18	*12.18	*7.64	*7.33	*5.61	4.64			*2.68	*2.68	
	4 outrigger down (over rear)	*13.50	*13.50	*12.18	*12.18	*7.64	*7.64	*5.61	5.21			*2.68	*2.68	
-3.0 m	Rear blade up (over front)	*21.49	*21.49	*12.68	7.90	6.28	4.15	3.96	2.64			*3.76	2.55	6.15
	Rear blade down (over rear)	*21.49	*21.49	*12.68	9.32	*7.79	4.79	*4.62	3.05			*3.76	2.94	
	Rear outrigger down (over rear)	*21.49	*21.49	*12.68	11.04	*7.79	5.54	*4.62	3.51			*3.76	3.38	
	Front outrigger and rear blade down (over rear)	*21.49	*21.49	*12.68	*12.68	*7.79	7.10	*4.62	4.46			*3.76	*3.76	
	Front blade and rear outrigger down (over rear)	*21.49	*21.49	*12.68	*12.68	*7.79	7.23	*4.62	4.53			*3.76	*3.76	
	4 outrigger down (over rear)	*21.49	*21.49	*12.68	*12.68	*7.79	*7.79	*4.62	*4.62			*3.76	*3.76	

LIFTING CAPACITIES

ZAXIS 170W MONOBLOCK BOOM, 2.58 M ARM, STANDARD GAUGE, 4 000 KG COUNTERWEIGHT

 Rating over front or rear  Rating over-side 360 degrees Unit: 1 000 kg

Stabilization		Load radius								At max. reach		
		3.0 m		4.5 m		6.0 m		7.5 m		At max. reach		Meter
												
6.0 m	Rear blade up (over front)					*3.75	3.01			*3.16	2.80	6.27
	Rear blade down (over rear)					*3.75	3.40			*3.16	3.15	
	Rear outrigger down (over rear)					*3.75	*3.75			*3.16	*3.16	
	Front outrigger and rear blade down (over rear)					*3.75	*3.75			*3.16	*3.16	
	Front blade and rear outrigger down (over rear)					*3.75	*3.75			*3.16	*3.16	
	4 outrigger down (over rear)					*3.75	*3.75			*3.16	*3.16	
4.5 m	Rear blade up (over front)			*5.47	4.59	4.57	2.95			*3.10	2.25	7.09
	Rear blade down (over rear)			*5.47	5.19	*4.76	3.33			*3.10	2.55	
	Rear outrigger down (over rear)			*5.47	*5.47	*4.76	3.93			*3.10	3.02	
	Front outrigger and rear blade down (over rear)			*5.47	*5.47	*4.76	*4.76			*3.10	*3.10	
	Front blade and rear outrigger down (over rear)			*5.47	*5.47	*4.76	*4.76			*3.10	*3.10	
	4 outrigger down (over rear)			*5.47	*5.47	*4.76	*4.76			*3.10	*3.10	
3.0 m	Rear blade up (over front)			*6.65	4.25	4.42	2.81	3.15	2.00	3.14	1.99	7.51
	Rear blade down (over rear)			*6.65	4.84	*5.16	3.19	*3.25	2.27	*3.21	2.27	
	Rear outrigger down (over rear)			*6.65	5.80	*5.16	3.79	*3.25	2.70	*3.21	2.70	
	Front outrigger and rear blade down (over rear)			*6.65	*6.65	*5.16	4.72	*3.25	*3.25	*3.21	*3.21	
	Front blade and rear outrigger down (over rear)			*6.65	*6.65	*5.16	4.84	*3.25	*3.25	*3.21	*3.21	
	4 outrigger down (over rear)			*6.65	*6.65	*5.16	*5.16	*3.25	*3.25	*3.21	*3.21	
1.5 m	Rear blade up (over front)			6.46	3.92	4.26	2.66	3.09	1.94	3.02	1.90	7.61
	Rear blade down (over rear)			*7.54	4.51	*5.54	3.04	*4.05	2.21	*3.49	2.17	
	Rear outrigger down (over rear)			*7.54	5.44	*5.54	3.63	*4.05	2.64	*3.49	2.59	
	Front outrigger and rear blade down (over rear)			*7.54	6.94	*5.54	4.56	*4.05	3.30	*3.49	3.24	
	Front blade and rear outrigger down (over rear)			*7.54	7.13	*5.54	4.67	*4.05	3.38	*3.49	3.31	
	4 outrigger down (over rear)			*7.54	*7.54	*5.54	5.42	*4.05	3.91	*3.49	*3.49	
0 m	Rear blade up (over front)	*5.44	*5.44	6.25	3.74	4.14	2.56			3.10	1.93	7.40
	Rear blade down (over rear)	*5.44	*5.44	*7.70	4.32	*5.61	2.93			*4.03	2.21	
	Rear outrigger down (over rear)	*5.44	*5.44	*7.70	5.24	*5.61	3.52			*4.03	2.65	
	Front outrigger and rear blade down (over rear)	*5.44	*5.44	*7.70	6.73	*5.61	4.44			*4.03	3.32	
	Front blade and rear outrigger down (over rear)	*5.44	*5.44	*7.70	6.92	*5.61	4.55			*4.03	3.40	
	4 outrigger down (over rear)	*5.44	*5.44	*7.70	*7.70	*5.61	5.30			*4.03	3.94	
-1.5 m	Rear blade up (over front)	*9.66	6.66	6.20	3.69	4.10	2.52			3.44	2.14	6.84
	Rear blade down (over rear)	*9.66	7.87	*7.07	4.27	*5.16	2.89			*4.22	2.45	
	Rear outrigger down (over rear)	*9.66	*9.66	*7.07	5.19	*5.16	3.48			*4.22	2.93	
	Front outrigger and rear blade down (over rear)	*9.66	*9.66	*7.07	6.68	*5.16	4.40			*4.22	3.69	
	Front blade and rear outrigger down (over rear)	*9.66	*9.66	*7.07	6.86	*5.16	4.51			*4.22	3.78	
	4 outrigger down (over rear)	*9.66	*9.66	*7.07	*7.07	*5.16	*5.16			*4.22	*4.22	
-3.0 m	Rear blade up (over front)	*7.39	6.81	*5.55	3.76					*3.90	2.67	5.85
	Rear blade down (over rear)	*7.39	*7.39	*5.55	4.33					*3.90	3.06	
	Rear outrigger down (over rear)	*7.39	*7.39	*5.55	5.26					*3.90	3.67	
	Front outrigger and rear blade down (over rear)	*7.39	*7.39	*5.55	*5.55					*3.90	*3.90	
	Front blade and rear outrigger down (over rear)	*7.39	*7.39	*5.55	*5.55					*3.90	*3.90	
	4 outrigger down (over rear)	*7.39	*7.39	*5.55	*5.55					*3.90	*3.90	

ZAXIS 170W MONOBLOCK BOOM, 2.58 M ARM, WIDE GAUGE, 4 000 KG COUNTERWEIGHT
 Rating over front or rear  Rating over-side 360 degrees Unit: 1 000 kg

Stabilization		Load radius								At max. reach		
		3.0 m		4.5 m		6.0 m		7.5 m				Meter
												
6.0 m	Rear blade up (over front)					*3.75	3.28			*3.16	3.05	6.27
	Rear blade down (over rear)					*3.75	3.70			*3.16	*3.16	
	Rear outrigger down (over rear)					*3.75	*3.75			*3.16	*3.16	
	Front outrigger and rear blade down (over rear)					*3.75	*3.75			*3.16	*3.16	
	Front blade and rear outrigger down (over rear)					*3.75	*3.75			*3.16	*3.16	
	4 outrigger down (over rear)					*3.75	*3.75			*3.16	*3.16	
4.5 m	Rear blade up (over front)			*5.47	5.01	4.57	3.22			*3.10	2.46	7.09
	Rear blade down (over rear)			*5.47	*5.47	*4.76	3.63			*3.10	2.78	
	Rear outrigger down (over rear)			*5.47	*5.47	*4.76	4.11			*3.10	*3.10	
	Front outrigger and rear blade down (over rear)			*5.47	*5.47	*4.76	*4.76			*3.10	*3.10	
	Front blade and rear outrigger down (over rear)			*5.47	*5.47	*4.76	*4.76			*3.10	*3.10	
	4 outrigger down (over rear)			*5.47	*5.47	*4.76	*4.76			*3.10	*3.10	
3.0 m	Rear blade up (over front)			*6.65	4.67	4.42	3.08	3.15	2.19	3.15	2.19	7.51
	Rear blade down (over rear)			*6.65	5.32	*5.16	3.49	*3.25	2.49	*3.21	2.48	
	Rear outrigger down (over rear)			*6.65	6.08	*5.16	3.96	*3.25	2.82	*3.21	2.82	
	Front outrigger and rear blade down (over rear)			*6.65	*6.65	*5.16	4.93	*3.25	*3.25	*3.21	*3.21	
	Front blade and rear outrigger down (over rear)			*6.65	*6.65	*5.16	5.02	*3.25	*3.25	*3.21	*3.21	
	4 outrigger down (over rear)			*6.65	*6.65	*5.16	*5.16	*3.25	*3.25	*3.21	*3.21	
1.5 m	Rear blade up (over front)			6.47	4.33	4.26	2.93	3.09	2.13	3.02	2.09	7.61
	Rear blade down (over rear)			*7.54	4.97	*5.54	3.33	*4.05	2.42	*3.49	2.37	
	Rear outrigger down (over rear)			*7.54	5.72	*5.54	3.80	*4.05	2.76	*3.49	2.71	
	Front outrigger and rear blade down (over rear)			*7.54	7.30	*5.54	4.76	*4.05	3.45	*3.49	3.38	
	Front blade and rear outrigger down (over rear)			*7.54	7.44	*5.54	4.85	*4.05	3.51	*3.49	3.44	
	4 outrigger down (over rear)			*7.54	*7.54	*5.54	5.42	*4.05	3.91	*3.49	*3.49	
0 m	Rear blade up (over front)	*5.44	*5.44	6.26	4.14	4.14	2.82			3.10	2.13	7.40
	Rear blade down (over rear)	*5.44	*5.44	*7.70	4.78	*5.61	3.22			*4.03	2.43	
	Rear outrigger down (over rear)	*5.44	*5.44	*7.70	5.52	*5.61	3.69			*4.03	2.77	
	Front outrigger and rear blade down (over rear)	*5.44	*5.44	*7.70	7.08	*5.61	4.64			*4.03	3.47	
	Front blade and rear outrigger down (over rear)	*5.44	*5.44	*7.70	7.22	*5.61	4.73			*4.03	3.53	
	4 outrigger down (over rear)	*5.44	*5.44	*7.70	*7.70	*5.61	5.30			*4.03	3.94	
-1.5 m	Rear blade up (over front)	*9.66	7.50	6.21	4.09	4.10	2.78			3.44	2.35	6.84
	Rear blade down (over rear)	*9.66	8.89	*7.07	4.73	*5.16	3.19			*4.22	2.69	
	Rear outrigger down (over rear)	*9.66	*9.66	*7.07	5.47	*5.16	3.65			*4.22	3.07	
	Front outrigger and rear blade down (over rear)	*9.66	*9.66	*7.07	7.02	*5.16	4.60			*4.22	3.85	
	Front blade and rear outrigger down (over rear)	*9.66	*9.66	*7.07	*7.07	*5.16	4.69			*4.22	3.92	
	4 outrigger down (over rear)	*9.66	*9.66	*7.07	*7.07	*5.16	*5.16			*4.22	*4.22	
-3.0 m	Rear blade up (over front)	*7.39	*7.39	*5.55	4.16					*3.90	2.94	5.85
	Rear blade down (over rear)	*7.39	*7.39	*5.55	4.80					*3.90	3.36	
	Rear outrigger down (over rear)	*7.39	*7.39	*5.55	5.54					*3.90	3.85	
	Front outrigger and rear blade down (over rear)	*7.39	*7.39	*5.55	*5.55					*3.90	*3.90	
	Front blade and rear outrigger down (over rear)	*7.39	*7.39	*5.55	*5.55					*3.90	*3.90	
	4 outrigger down (over rear)	*7.39	*7.39	*5.55	*5.55					*3.90	*3.90	

LIFTING CAPACITIES

ZAXIS 170W 2-PIECE BOOM, 2.50 M ARM, STANDARD GAUGE, 4 000 KG COUNTERWEIGHT

 Rating over front or rear  Rating over-side 360 degrees Unit: 1 000 kg

Stabilization		Load radius										At max. reach		
		1.5 m		3.0 m		4.5 m		6.0 m		7.5 m		At max. reach		Meter
														
7.5 m	Rear blade up (over front)					*4.26	*4.26					*2.45	*2.45	5.48
	Rear blade down (over rear)					*4.26	*4.26					*2.45	*2.45	
	Rear outrigger down (over rear)					*4.26	*4.26					*2.45	*2.45	
	Front outrigger and rear blade down (over rear)					*4.26	*4.26					*2.45	*2.45	
	Front blade and rear outrigger down (over rear)					*4.26	*4.26					*2.45	*2.45	
	4 outrigger down (over rear)					*4.26	*4.26					*2.45	*2.45	
6.0 m	Rear blade up (over front)					*4.36	*4.36	*4.08	3.09			*2.12	*2.12	6.76
	Rear blade down (over rear)					*4.36	*4.36	*4.08	3.47			*2.12	*2.12	
	Rear outrigger down (over rear)					*4.36	*4.36	*4.08	4.06			*2.12	*2.12	
	Front outrigger and rear blade down (over rear)					*4.36	*4.36	*4.08	*4.08			*2.12	*2.12	
	Front blade and rear outrigger down (over rear)					*4.36	*4.36	*4.08	*4.08			*2.12	*2.12	
	4 outrigger down (over rear)					*4.36	*4.36	*4.08	*4.08			*2.12	*2.12	
4.5 m	Rear blade up (over front)			*6.56	*6.56	*5.09	*4.65	*4.33	3.12	*2.16	2.02	*2.01	*2.01	7.52
	Rear blade down (over rear)			*6.56	*6.56	*5.09	*5.09	*4.33	3.47	*2.16	*2.16	*2.01	*2.01	
	Rear outrigger down (over rear)			*6.56	*6.56	*5.09	*5.09	*4.33	4.01	*2.16	*2.16	*2.01	*2.01	
	Front outrigger and rear blade down (over rear)			*6.56	*6.56	*5.09	*5.09	*4.33	*4.33	*2.16	*2.16	*2.01	*2.01	
	Front blade and rear outrigger down (over rear)			*6.56	*6.56	*5.09	*5.09	*4.33	*4.33	*2.16	*2.16	*2.01	*2.01	
	4 outrigger down (over rear)			*6.56	*6.56	*5.09	*5.09	*4.33	*4.33	*2.16	*2.16	*2.01	*2.01	
3.0 m	Rear blade up (over front)			*7.61	*7.61	*6.25	4.51	*4.56	3.09	3.24	2.02	*2.00	1.79	7.92
	Rear blade down (over rear)			*7.61	*7.61	*6.25	5.03	*4.80	3.43	*4.05	2.30	*2.00	*2.00	
	Rear outrigger down (over rear)			*7.61	*7.61	*6.25	5.84	*4.80	3.95	*4.05	2.73	*2.00	*2.00	
	Front outrigger and rear blade down (over rear)			*7.61	*7.61	*6.25	*6.25	*4.80	*4.74	*4.05	3.40	*2.00	*2.00	
	Front blade and rear outrigger down (over rear)			*7.61	*7.61	*6.25	*6.25	*4.80	*4.80	*4.05	3.48	*2.00	*2.00	
	4 outrigger down (over rear)			*7.61	*7.61	*6.25	*6.25	*4.80	*4.80	*4.05	*4.00	*2.00	*2.00	
1.5 m	Rear blade up (over front)			*9.58	7.75	6.69	4.46	4.53	3.02	3.19	1.97	*2.09	1.71	8.02
	Rear blade down (over rear)			*9.58	*8.82	*7.22	4.97	*5.26	3.41	*4.25	2.25	*2.09	1.97	
	Rear outrigger down (over rear)			*9.58	*9.58	*7.22	*5.77	*5.26	3.95	*4.25	2.68	*2.09	*2.09	
	Front outrigger and rear blade down (over rear)			*9.58	*9.58	*7.22	*6.98	*5.26	4.71	*4.25	3.34	*2.09	*2.09	
	Front blade and rear outrigger down (over rear)			*9.58	*9.58	*7.22	*7.12	*5.26	4.80	*4.25	3.42	*2.09	*2.09	
	4 outrigger down (over rear)			*9.58	*9.58	*7.22	*7.22	*5.26	*5.26	*4.25	3.95	*2.09	*2.09	
0 m	Rear blade up (over front)	*8.35	*8.35	*11.27	7.85	6.74	4.42	4.54	2.86	3.11	1.89	*2.29	1.75	7.82
	Rear blade down (over rear)	*8.35	*8.35	*11.27	8.95	*7.53	5.04	*5.47	3.24	*4.26	2.17	*2.29	2.01	
	Rear outrigger down (over rear)	*8.35	*8.35	*11.27	*10.65	*7.53	*5.83	*5.47	3.84	*4.26	2.60	*2.29	*2.29	
	Front outrigger and rear blade down (over rear)	*8.35	*8.35	*11.27	*11.27	*7.53	7.02	*5.47	4.77	*4.26	3.27	*2.29	*2.29	
	Front blade and rear outrigger down (over rear)	*8.35	*8.35	*11.27	*11.27	*7.53	*7.16	*5.47	4.88	*4.26	3.35	*2.29	*2.29	
	4 outrigger down (over rear)	*8.35	*8.35	*11.27	*11.27	*7.53	*7.53	*5.47	*5.39	*4.26	3.87	*2.29	*2.29	
-1.5 m	Rear blade up (over front)	*13.50	*13.50	*12.18	7.52	6.99	4.23	4.36	2.67			*2.68	1.92	7.29
	Rear blade down (over rear)	*13.50	*13.50	*12.18	8.81	*7.64	4.84	*5.61	3.06			*2.68	2.21	
	Rear outrigger down (over rear)	*13.50	*13.50	*12.18	10.97	*7.64	5.81	*5.61	3.66			*2.68	2.66	
	Front outrigger and rear blade down (over rear)	*13.50	*13.50	*12.18	*12.18	*7.64	*7.23	*5.61	4.59			*2.68	*2.68	
	Front blade and rear outrigger down (over rear)	*13.50	*13.50	*12.18	*12.18	*7.64	*7.35	*5.61	4.70			*2.68	*2.68	
	4 outrigger down (over rear)	*13.50	*13.50	*12.18	*12.18	*7.64	*7.64	*5.61	5.46			*2.68	*2.68	
-3.0 m	Rear blade up (over front)	*21.49	*21.49	*12.68	7.47	6.72	3.99	4.25	2.56			*3.76	2.47	6.15
	Rear blade down (over rear)	*21.49	*21.49	*12.68	8.76	*7.79	4.59	*4.62	2.94			*3.76	2.84	
	Rear outrigger down (over rear)	*21.49	*21.49	*12.68	10.92	*7.79	5.55	*4.62	3.54			*3.76	3.42	
	Front outrigger and rear blade down (over rear)	*21.49	*21.49	*12.68	*12.68	*7.79	7.08	*4.62	4.48			*3.76	*3.76	
	Front blade and rear outrigger down (over rear)	*21.49	*21.49	*12.68	*12.68	*7.79	7.28	*4.62	4.59			*3.76	*3.76	
	4 outrigger down (over rear)	*21.49	*21.49	*12.68	*12.68	*7.79	*7.79	*4.62	*4.62			*3.76	*3.76	

ZAXIS 170W 2-PIECE BOOM, 2.50 M ARM, WIDE GAUGE, 4 000 KG COUNTERWEIGHT

 Rating over front or rear  Rating over-side 360 degrees Unit: 1 000 kg

Stabilization		Load radius										At max. reach		
		1.5 m		3.0 m		4.5 m		6.0 m		7.5 m		At max. reach		Meter
														
7.5 m	Rear blade up (over front)					*4.26	*4.26					*2.45	*2.45	5.48
	Rear blade down (over rear)					*4.26	*4.26					*2.45	*2.45	
	Rear outrigger down (over rear)					*4.26	*4.26					*2.45	*2.45	
	Front outrigger and rear blade down (over rear)					*4.26	*4.26					*2.45	*2.45	
	Front blade and rear outrigger down (over rear)					*4.26	*4.26					*2.45	*2.45	
	4 outrigger down (over rear)					*4.26	*4.26					*2.45	*2.45	
6.0 m	Rear blade up (over front)					*4.36	*4.36	*4.08	3.36			*2.12	*2.12	6.76
	Rear blade down (over rear)					*4.36	*4.36	*4.08	*3.77			*2.12	*2.12	
	Rear outrigger down (over rear)					*4.36	*4.36	*4.08	*4.08			*2.12	*2.12	
	Front outrigger and rear blade down (over rear)					*4.36	*4.36	*4.08	*4.08			*2.12	*2.12	
	Front blade and rear outrigger down (over rear)					*4.36	*4.36	*4.08	*4.08			*2.12	*2.12	
	4 outrigger down (over rear)					*4.36	*4.36	*4.08	*4.08			*2.12	*2.12	
4.5 m	Rear blade up (over front)			*6.56	*6.56	*5.09	5.02	*4.33	3.36	*2.16	*2.16	*2.01	*2.01	7.52
	Rear blade down (over rear)			*6.56	*6.56	*5.09	*5.09	*4.33	3.74	*2.16	*2.16	*2.01	*2.01	
	Rear outrigger down (over rear)			*6.56	*6.56	*5.09	*5.09	*4.33	4.16	*2.16	*2.16	*2.01	*2.01	
	Front outrigger and rear blade down (over rear)			*6.56	*6.56	*5.09	*5.09	*4.33	*4.33	*2.16	*2.16	*2.01	*2.01	
	Front blade and rear outrigger down (over rear)			*6.56	*6.56	*5.09	*5.09	*4.33	*4.33	*2.16	*2.16	*2.01	*2.01	
	4 outrigger down (over rear)			*6.56	*6.56	*5.09	*5.09	*4.33	*4.33	*2.16	*2.16	*2.01	*2.01	
3.0 m	Rear blade up (over front)			*7.61	*7.61	*6.25	4.87	4.49	*3.33	3.19	2.21	*2.00	1.98	7.92
	Rear blade down (over rear)			*7.61	*7.61	*6.25	5.44	*4.80	3.69	*4.05	2.52	*2.00	*2.00	
	Rear outrigger down (over rear)			*7.61	*7.61	*6.25	6.08	*4.80	4.10	*4.05	2.86	*2.00	*2.00	
	Front outrigger and rear blade down (over rear)			*7.61	*7.61	*6.25	*6.25	*4.80	*4.80	*4.05	3.54	*2.00	*2.00	
	Front blade and rear outrigger down (over rear)			*7.61	*7.61	*6.25	*6.25	*4.80	*4.80	*4.05	3.60	*2.00	*2.00	
	4 outrigger down (over rear)			*7.61	*7.61	*6.25	*6.25	*4.80	*4.80	*4.05	*4.00	*2.00	*2.00	
1.5 m	Rear blade up (over front)			*9.58	8.50	6.61	4.82	4.47	3.29	3.13	2.16	*2.09	1.89	8.02
	Rear blade down (over rear)			*9.58	*9.58	*7.22	5.38	*5.26	*3.71	*4.25	2.46	*2.09	*2.09	
	Rear outrigger down (over rear)			*9.58	*9.58	*7.22	*6.00	*5.26	4.10	*4.25	2.80	*2.09	*2.09	
	Front outrigger and rear blade down (over rear)			*9.58	*9.58	*7.22	*7.22	*5.26	4.87	*4.25	3.49	*2.09	*2.09	
	Front blade and rear outrigger down (over rear)			*9.58	*9.58	*7.22	*7.22	*5.26	*4.94	*4.25	3.54	*2.09	*2.09	
	4 outrigger down (over rear)			*9.58	*9.58	*7.22	*7.22	*5.26	*5.26	*4.25	3.95	*2.09	*2.09	
0 m	Rear blade up (over front)	*8.35	*8.35	*11.27	8.62	6.66	4.85	*4.47	3.12	3.05	2.08	*2.29	1.93	7.82
	Rear blade down (over rear)	*8.35	*8.35	*11.27	9.82	*7.53	5.44	*5.47	3.54	*4.26	2.38	*2.29	2.22	
	Rear outrigger down (over rear)	*8.35	*8.35	*11.27	11.16	*7.53	6.07	*5.47	4.01	*4.26	2.72	*2.29	*2.29	
	Front outrigger and rear blade down (over rear)	*8.35	*8.35	*11.27	*11.27	*7.53	7.27	*5.47	4.95	*4.26	3.41	*2.29	*2.29	
	Front blade and rear outrigger down (over rear)	*8.35	*8.35	*11.27	*11.27	*7.53	*7.36	*5.47	5.00	*4.26	3.47	*2.29	*2.29	
	4 outrigger down (over rear)	*8.35	*8.35	*11.27	*11.27	*7.53	*7.53	*5.47	*5.39	*4.26	3.87	*2.29	*2.29	
-1.5 m	Rear blade up (over front)	*13.50	*13.50	*12.18	8.41	6.88	4.65	*4.29	2.94			*2.68	2.12	7.29
	Rear blade down (over rear)	*13.50	*13.50	*12.18	9.89	*7.64	5.33	*5.61	3.36			*2.68	2.43	
	Rear outrigger down (over rear)	*13.50	*13.50	*12.18	11.46	*7.64	6.10	*5.61	3.83			*2.68	*2.68	
	Front outrigger and rear blade down (over rear)	*13.50	*13.50	*12.18	*12.18	*7.64	7.45	*5.61	4.80			*2.68	*2.68	
	Front blade and rear outrigger down (over rear)	*13.50	*13.50	*12.18	*12.18	*7.64	7.53	*5.61	4.87			*2.68	*2.68	
	4 outrigger down (over rear)	*13.50	*13.50	*12.18	*12.18	*7.64	*7.64	*5.61	5.46			*2.68	*2.68	
-3.0 m	Rear blade up (over front)	*21.49	*21.49	*12.68	8.36	6.61	4.41	4.19	2.83			*3.76	2.73	6.15
	Rear blade down (over rear)	*21.49	*21.49	*12.68	9.84	*7.79	5.08	*4.62	3.24			*3.76	3.13	
	Rear outrigger down (over rear)	*21.49	*21.49	*12.68	11.62	*7.79	5.84	*4.62	3.72			*3.76	3.59	
	Front outrigger and rear blade down (over rear)	*21.49	*21.49	*12.68	*12.68	*7.79	7.45	*4.62	*4.62			*3.76	*3.76	
	Front blade and rear outrigger down (over rear)	*21.49	*21.49	*12.68	*12.68	*7.79	7.58	*4.62	*4.62			*3.76	*3.76	
	4 outrigger down (over rear)	*21.49	*21.49	*12.68	*12.68	*7.79	*7.79	*4.62	*4.62			*3.76	*3.76	


SPECIFICATIONS

WORKING RANGES


MONOBLOCK BOOM

2-PIECE BOOM

meter

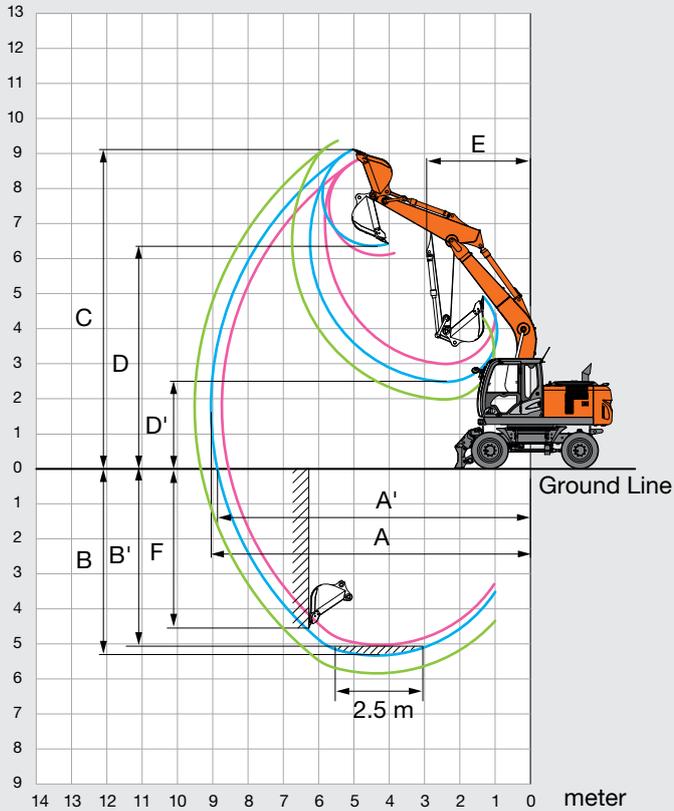

meter

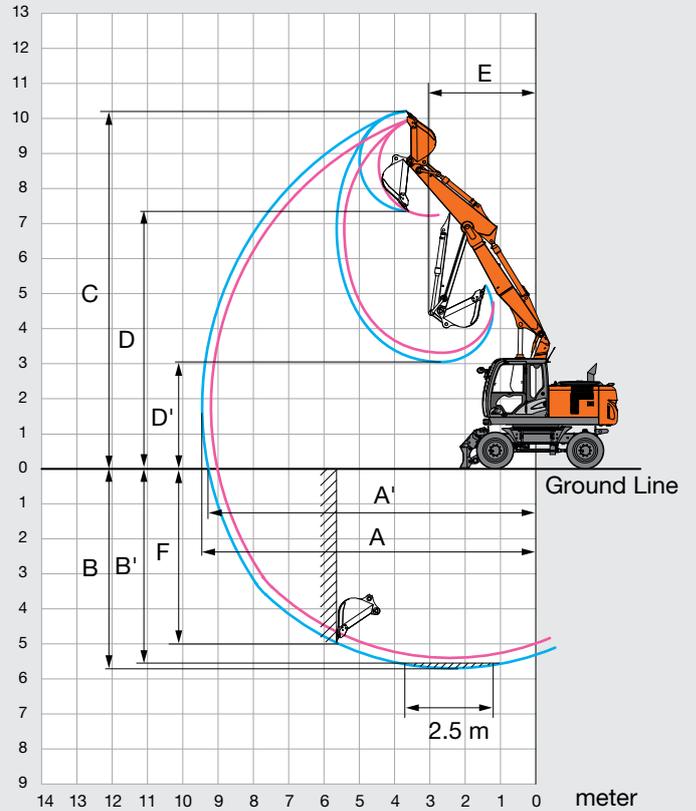

Unit: mm

	ZAXIS 170W				
	Monoblock boom			2-Piece boom	
Arm length	2.22 m	2.58 m	3.08 m	2.21 m	2.50 m
A Max. digging reach	8 690	9 050	9 500	9 190	9 450
A' Max. digging reach (on ground)	8 500	8 870	9 330	9 010	9 280
B Max. digging depth	4 960	5 330	5 830	5 430	5 720
B' Max. digging depth (2.5 m level)	4 740	5 130	5 650	5 330	5 620
C Max. cutting height	8 820	9 100	9 360	10 010	10 200
D Max. dumping height	6 130	6 360	6 610	7 160	7 340
D' Min. dumping height	2 990	2 480	1 980	3 360	3 050
E Min. swing radius	3 380	2 940	2 970	3 040	3 030
F Max. vertical wall digging depth	4 440	4 810	5 320	4 760	5 050

EQUIPMENT

● Standard equipment ○ Optional equipment

ENGINE

Air cleaner double filters	●
Auto idle system	●
Auto shut-down control	●
Cartridge-type engine oil filter	●
Cold fuel resistance valve	○
Dry-type air filter with evacuator valve (with air filter restriction indicator)	●
Dust-proof indoor net	●
ECO/PWR mode control	●
Electrical fuel feed pump	●
Engine oil drain coupler	●
Engine warm-up device	●
Fan guard	●
Fuel cooler	●
Fuel main filter	●
Fuel pre-filter	●
High performance water separator	●
Isolation-mounted engine	●
Muffler filter	●
Pre-cleaner	○
Radiator reserve tank	●
Radiator, oil cooler and intercooler	●
50 A alternator	●

HYDRAULIC SYSTEM

Auto power lift	●
Control valve with main relief valve	●
Extra port for control valve	●
Full-flow filter	●
High mesh full flow filter with restriction indicator	○
Hose rupture valve for arm	○
Hose rupture valve for boom	●
Pilot filter	●
Power boost	●
Shockless valve in pilot circuit	●
Steering filter	●
Suction filter	●
Swing dampener valve	●
Variable relief valve for breaker & crusher	●
Work mode selector	●

CAB

All-weather sound suppressed steel cab	●
AM-FM radio	●
Ashtray	●
Auto control air conditioner	●
AUX. terminal and storage	●
Auxiliary function lever	●
CRES V (Center pillar reinforced structure) cab	●
Drink holder with hot & cool function	●
Electric double horn	●
Engine shut-off switch	●
Equipped with reinforced, tinted (green color) glass windows	●
Evacuation hammer	●
Floor mat	●
Footrest	●
Front window washer	●
Hot & cool box	●
Intermittent windshield wipers	●
Key cylinder light	●
Laminated round glass window	○
LED room light with door courtesy	●
OPG top guard fitted Level II (ISO10262) compliant cab	○
Pilot control shut-off lever	●
Rain guard	●
Rear tray	●
Retractable seat belt	●
ROPS (ISO12117-2) compliant cab	●
Rubber radio antenna	●
Seat : air suspension seat with heater	●
Seat adjustment part : backrest, armrest, height and angle, slide forward / back	●
Short wrist control levers	●
Sun visor (front window)	●
Sun visor (side window)	○
Transparent roof with slide curtain	●
Windows on front, upper, lower and left side can be openend	●
2 speakers	●
4 fluid-filled elastic mounts	●
12 V power outlet	○
24 V cigarette lighter	●

MONITOR SYSTEM

Alarm buzzers: overheat, engine oil pressure, overload	●
Alarms: overheat, engine warning, engine oil pressure, alternator, minimum fuel level, hydraulic filter restriction, air filter restriction, work mode, overload, etc	●
Attachment operational information	●
Display of meters: Speedometer, Tachometer, Trip meter, water temperature, hour, fuel rate, clock	●
Other displays: work mode, auto-idle, glow, rearview monitor, operating conditions, etc	●
32 languages selection	●

LIGHTS

Additional boom light with cover	○
Additional cab roof front lights	○
Additional cab roof rear lights	○
Brake lamps	●
Clearance lamps	●
Hazard lamps	●
Licence lamp	○
Rotating lamp	○
Turn signal lamps	●
Working lights	●
2 head lights	●

UPPER STRUCTURE

Electric fuel refilling pump with auto stop and filter	●
Fuel level float	●
Hydraulic oil level gauge	●
Rear view camera	●
Rear view mirror (right & left side)	●
Side view camera	○
Swing parking brake	●
Undercover	●
93 Ah batteries	●
3 600 kg counterweight	●
4 000 kg counterweight	○

UNDERCARRIAGE

Clamshell bracket	○
Front cover	○
Front dozer blade + rear outrigger	○
Front outrigger + rear dozer blade	○
Front outrigger + rear outrigger	○
Parking brake	●
Rear dozer blade	○
Rear outrigger	○
Right toolbox	○
Tire spacer	●
Toolbox: left chassis	●
Traction types pattern tires (10.00-20 14 PR)	●
Wide gauge axles	○
4 tie down hooks	●

FRONT ATTACHMENTS

Casted bucket link A	●
Centralized lubrication system	●
Dirt seal on all bucket pins	●
Flanged pin	●
HN bushing	●
Reinforced link B	○
Reinforced resin thrust plate	●
WC (tungsten-carbide) thermal spraying	●
Welded bucket link A with welded hook	○

ATTACHMENTS

Accessories for 2 speed selector	○
Additional piping	○
Additional pump (30 L/min)	○
Attachment basic piping	●
Breaker and crusher piping	●
Clamshell piping	○
HSB Parts for breaker and crusher	●
Pilot accumulator	●
PTO valve	○

MISCELLANEOUS

Global e-Service	●
Lockable fuel refilling cap	●
Lockable machine covers	●
Onboard information controller	●
Skid-resistant, plates and handrails	●
Standard tool kit	●
Theft prevention system*	○
Travel direction mark on chassis frame	●

Standard and optional equipment may vary by country, so please consult your Hitachi dealer for details.

* Hitachi Construction Machinery cannot be held liable for theft, any system will just minimize the risk of theft.



Built on the foundation of superb technological capabilities, Hitachi Construction Machinery is committed to providing leading-edge solutions and services to contribute as a reliable partner to the business of customers worldwide.

Hitachi Environmental Vision 2025

The Hitachi Group released the Environmental Vision 2025 to curb annual carbon dioxide emissions. The Group is committed to global production while reducing environmental impact in life cycles of all products, and realizing a sustainable society by tackling three goals — prevention of global warming, recycling of resources, and enhancement of ecosystem.

Reducing Environmental Impact by New ZAXIS

Hitachi makes a green way to cut carbon emissions for global warming prevention according to LCA*. New ZAXIS utilizes lots of technological advances, including the new ECO mode, and Isochronous Control. Hitachi has long been committed to recycling of components, such as aluminum parts in radiators and oil cooler. Resin parts are marked for recycling.

*Life Cycle Assessment – ISO 14040

Prior to operating this machine, including satellite communication system, in a country other than a country of its intended use, it may be necessary to make modifications to it so that it complies with the local regulatory standards (including safety standards) and legal requirements of that particular country. Please do not export or operate this machine outside the country of its intended use until such compliance has been confirmed. Please contact your Hitachi dealer in case of questions about compliance. These specifications are subject to change without notice.

Illustrations and photos show the standard models, and may or may not include optional equipment, accessories, customer installed and modified parts, optional parts and all standard equipment with some differences in color and features. Before use, read and understand the Operator's Manual for proper operation.



KS-EN228EU